


Installation Instructions

1. Unplug the power door opener and disconnect it from the door.
2. Raise garage door completely.
3. Fasten “C” Clamps on both the left and right door tracks against the bottom side of two rollers.
4. With tension completely off of cable, untie loose end of cable from either the track support or the attaching plate.
5. Thread cable through the pulley. Remove pulley using wrench and replace with new pulley.
6. Rethread cable through the pulley and retie loose end of cable to either the track support or the attaching plate.
7. Slowly lower the door by hand to check that the cable is properly fed through the pulleys.

Tools Required:
Wrench
C-Clamps

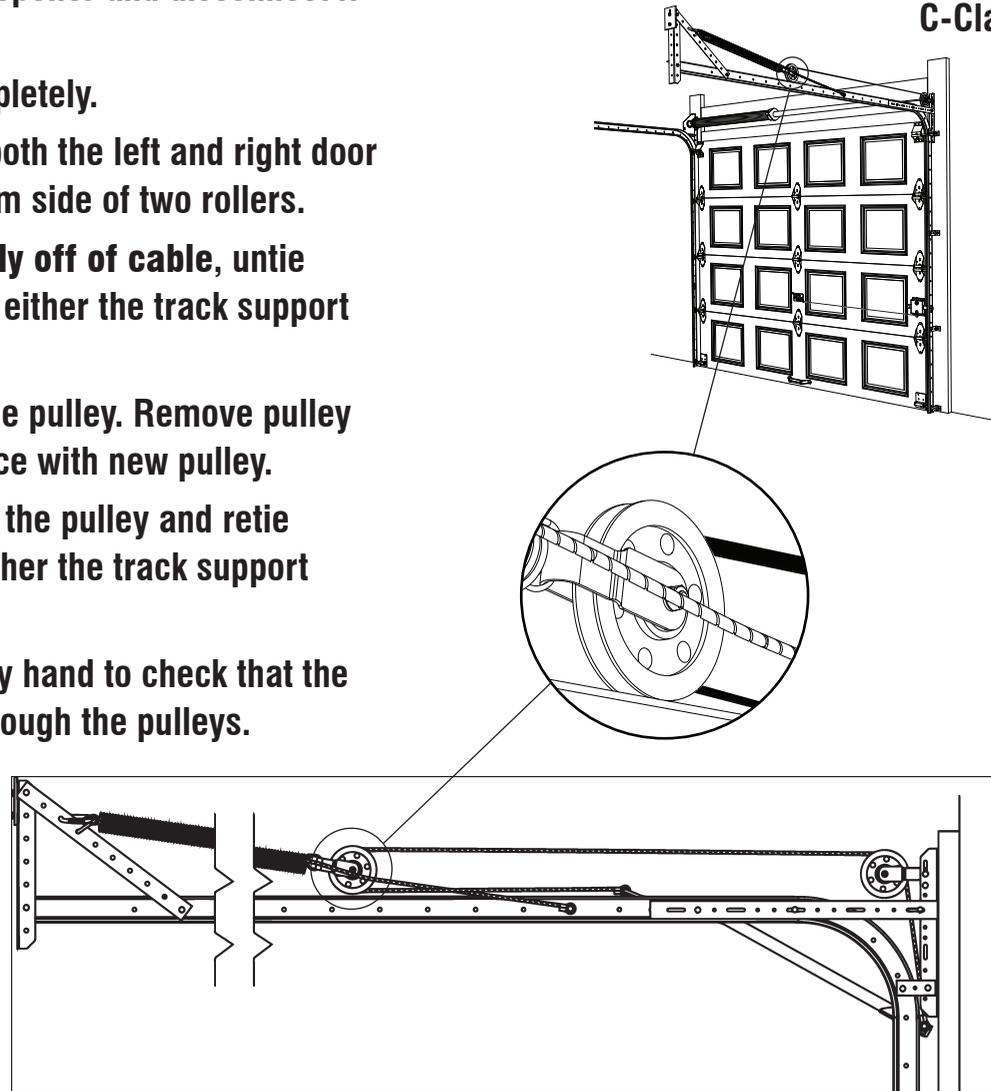

Warning: Improper installation or door position can result in serious injury or death.

- Be sure to read and fully understand all instructions before starting any work.
- Wear eye protection.
- Disconnect power door opener from door before any other step.
- Do not remove more than one part at a time.
- Do not raise or lower without all components installed and tightly secured.
- This hardware is only intended for residential garage doors.
- All hardware, especially extension and torsion springs, is under extreme tension at all times.
- All tension must be released from springs before performing any work.
- If you are unsure if the replacement part matches the part to be replaced or if you do not understand the installation instructions, contact a professional installer.