





Double-sided Channel Lock

ROUTING INSTRUCTIONS

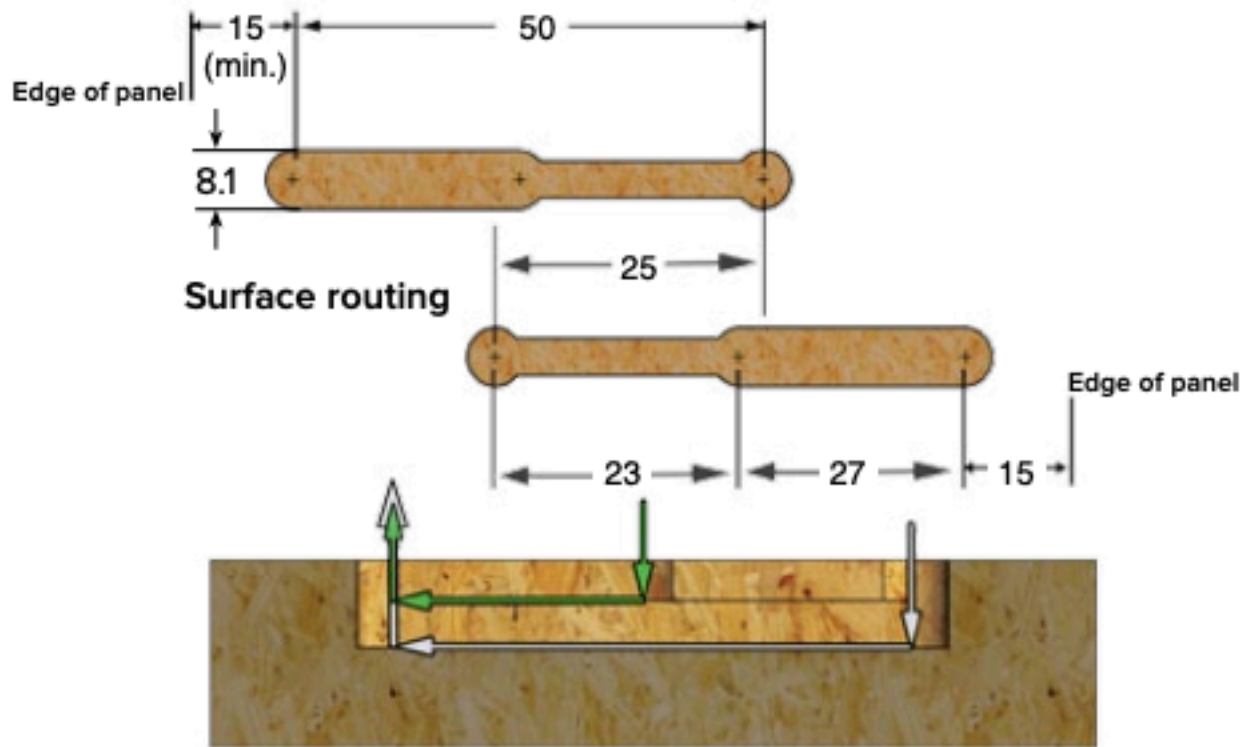

-  Plunge Cut: Z: -4.5 | Slot Cut: X: 0 to 34
-  Plunge Cut: Z: -9.0 | Key Slot: X: -30 to 34
(Allowable depth range is -9.0 to -9.3)

Route **GREEN** first. Then **GRAY**.

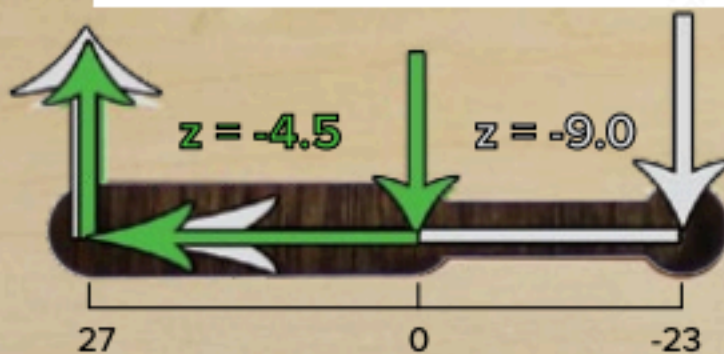

All measurements are in mm