




Brand	Root
N/A	TRZ...

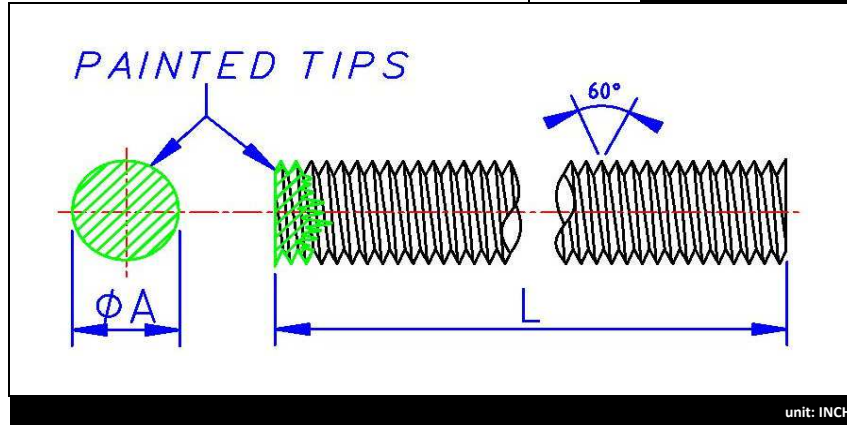

<b>L</b> LENGTH TOLERANCE	<b>12"</b>	$\pm 1/16$
	<b>36"</b>	$\pm 1/8$
	<b>72"</b>	$\pm 1/4$
	<b>120"</b>	$\pm 3/8$

THREAD SIZE UNC/UNF Class 2A	PAINTED TIPS COLOR		A DIAMETER	THREAD PER INCH	Pcs/Bundle
6 - 32		Min	0.131	32	5
		Max	0.138		
8 - 32		Min	0.157	32	5
		Max	0.164		
10 - 24		Min	0.182	24	5
		Max	0.190		
10 - 32		Min	0.183	32	5
		Max	0.190		
1/4		Min	0.241	20	5
		Max	0.250		
5/16		Min	0.302	18	5
		Max	0.312		
3/8		Min	0.364	16	5
		Max	0.375		
7/16		Min	0.426	14	5
		Max	0.437		
1/2		Min	0.488	13	5
		Max	0.500		
5/8		Min	0.611	11	5
		Max	0.625		
3/4		Min	0.735	10	5
		Max	0.750		
7/8		Min	0.859	9	5
		Max	0.875		
1		Min	0.983	8	5
		Max	1.000		

**Full Threaded Rod, Zinc Plated**  
Shall be made of Low carbon steel ASTM A307 (A)

Root = Threaded Rod Zinc

**Bulk Label Description:**

English: FULL THREADED RODS, A-307 MILD STEEL, ZINC  
 French: TIGE FILETÉE COMPLÈTE, ACIER DOUX A-307, PLAQUÉ ZINC  
 Spanish:

Date : 9 mai 2018

Done by : P.B.