


DW#	B1-FF01c					SQ2 - FPN - FFAB							Revision Record			
------------	-----------------	--	--	--	--	-------------------------	--	--	--	--	--	--	------------------------	--	--	--

Part No.	Nominal Length	S		L	
		Inch	mm	Inch	mm
12216	1-1/4"	0.66"~0.75"	17~19	1.20"~1.25"	30.5~31.7
12217	1-1/2"	0.78"~0.87"	20~22	1.45"~1.50"	36.9~38.1

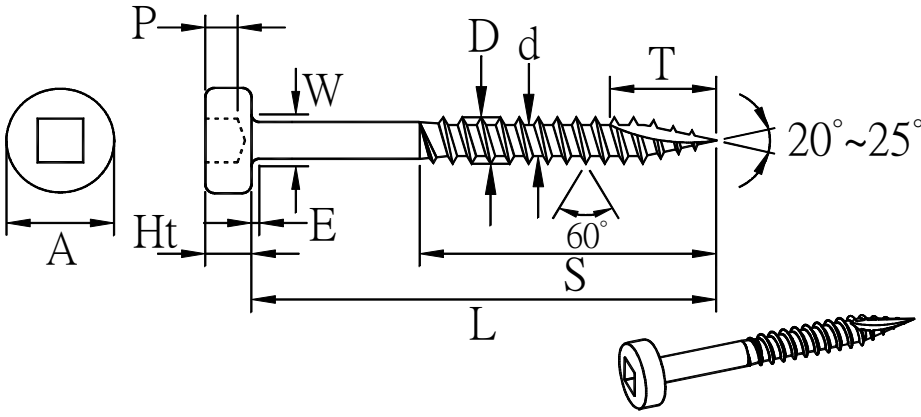

Date	Dim./Spec.	Old	New

Unit	Size/ Thrds	A	Ht	Gauge		W	E	D	d	T	Wire	Torque
				Square	Recess							
				P	P							
Inch	#6-20	0.290"	0.120"	#2	0.075"	Max.	Max.	0.139"	0.104"	0.375"	0.111"	30
		0.283"	0.107"		0.065"	0.178"	0.044"	0.132"	0.098"	0.295"		lbf.in
mm	#6-20	7.35	3.04	#2	1.90	Max.	Max.	3.53	2.64	9.50	2.80	35
		7.20	2.72		1.66	4.50	1.10	3.36	2.51	7.50		kgf.cm

Specifications:

Material: SAE C1018 / C1022

Recess: #2 Square

Head: Flat Pan Head

Thread: F.F.(TY-AB/20°~25° / TY-17)

Heat Treatment: Surface Hardness: HV550~800 ; Core Hardness: HV320~450

Bending Angle: >15°Breaking

Case Depth: 0.10~0.23mm

Surface: Dry+Lube

Customer approve: w/date	
Approved by : w/date	
CAD by : w/date	
Issued date :	year - month - day