


DW#	B1-QS06f	PQ2 - RWH - QS45	Revision Record			
------------	-----------------	-------------------------	------------------------	--	--	--

Part No.	SIZE	S		L	
		Inch	mm	Inch	mm
12381	#9x3-1/4"	2.04"~2.17"	52~55	3.20"~3.25"	81.3~82.5
12382	#9x3-1/2"	2.20"~2.33"	56~59	3.42"~3.50"	86.9~88.9
51384	#9x4"	2.51"~2.64"	64~67	3.92"~4.00"	99.6~101.6

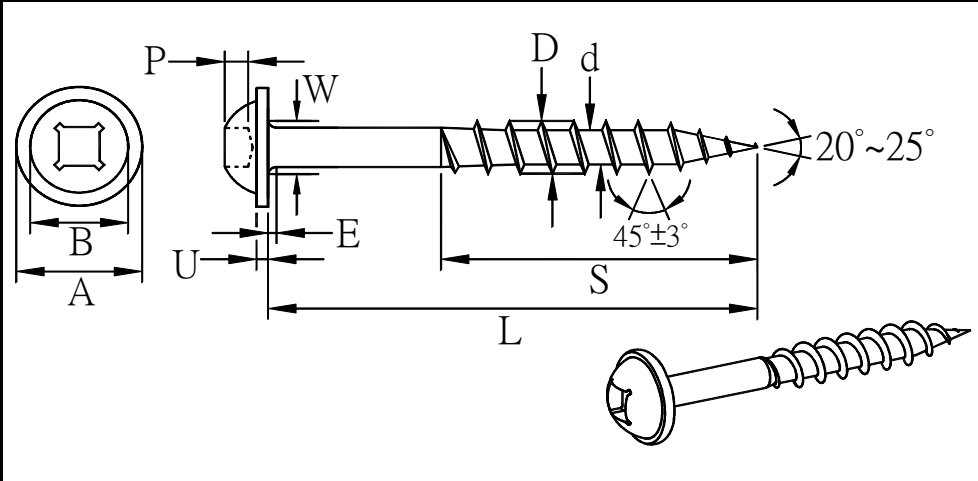

Date	Dim./Spec.	Old	New

Unit	Customer size	Size/Thrds	A	B	Gauge		U	W	E	D	d	Wire	Torque
					PH-SQ	Combo							
					Recess	P							
Inch	#8-11	#9-10	0.365"	0.270"	#2	0.075"	0.045"	Max.	Max.	0.181"	0.110"	0.126"	32
mm			0.350"	0.250"		0.065"	0.034"	0.213"	0.048"	0.174"	0.098"		37
			9.27	6.85	#2	1.90	1.14	Max.	Max.	4.59	2.78	3.20	37
			8.90	6.35	#2	1.66	0.88	5.40	1.20	4.42	2.50		kgf.cm

UNIT: mm

Specifications

Material: SAE C1018 / C1022

Recess: #2 PH-SQ Combo

Head: Round washer head

Thread: 45° Thread

Heat Treatment: Surface Hardness: HV450~800 ; Core Hardness: HV320~450

Bending Angle: > 15° Breaking

Surface: Dry+Lube

Customer approve:	
w/date	
Approved by :	
w/date	
CAD by :	
w/date	
Issued date :	
year - month - day	