


DW#	A1-QS24g				
Part No.	Size	S		Surface	Packing
		Inch	mm		
4460 / PH	#8x7/16"	Full	Full	zinc	bulk
6295 / PH	#8x7/16"	Full	Full	zinc	box
10123 / PH	#8x7/16"	Full	Full	blk	bulk
10255 / CO	#8x7/16"	Full	Full	zinc	bulk
10256 / CO	#8x7/16"	Full	Full	blk	bulk

PH2/PQ2 - TRH - QS45

Revision Record

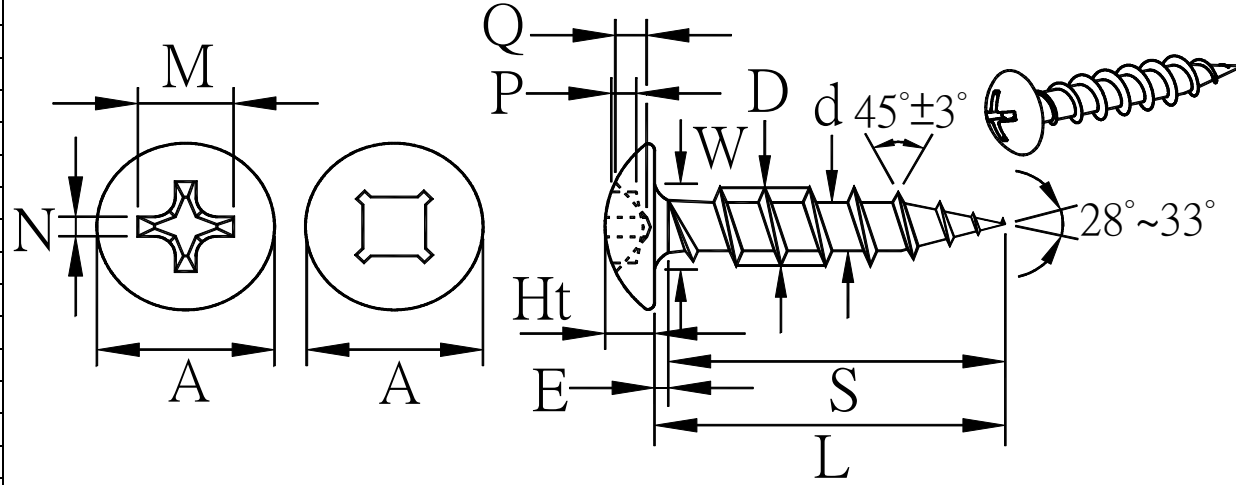

Date	Dim./Spec.	Old	New

Unit	Size /Thrds	Phillips			Gage				Ht (Phillips)	Ht (Combo)	W (Combo)	E (Combo)	W (Phillips)	E (Phillips)	D	d	L	Wire	Torque
		A	M	N	Phillips		PH-SQ Combo												
					Recess	Q	Recess	P											
Inch	#8-11	0.321"	0.176"	Min.	#2	0.079" 0.066"	#2	0.065"	0.086"	0.094"	Max.	Max.	Max.	Max.	0.168"	0.103"	0.438"	0.120"	27 lbf.in
		0.303"	0.164"	0.039"				0.057"	0.074"	0.081"	0.197"	0.048"	0.170"	0.040"	0.160"	0.093"	0.397"		
mm	8.15	4.47	Min.	2.00				1.65	2.18	2.38	Max.	Max.	Max.	Max.	4.26	2.61	11.10		
		7.70	4.17	1.00	1.70	1.45	1.88	2.06	5.00	1.20	4.30	1.00	4.07	2.38	10.10				

Specification:
 Material: C1022(C1018)
 Recess: #2 Phillips / #2PH-SQ Combo
 Head: Truss Head
 Thread: 45° Thread
 Heat Treatment: Surface Hardness: HV450~800 ; Core Hardness: HV320~450
 Bending Angle: > 15° Breaking

Customer Approve:	
w/date	
Approved by :	
w/date	
CAD by :	Steven Huang
w/date	2014.9.10
Issued date :	2014.9.10
w/date	year-month-day