


DW#	B1-1714d					SQ2 - F4B - 17QS							Revision Record			
-----	----------	--	--	--	--	------------------	--	--	--	--	--	--	-----------------	--	--	--

Part No.	SIZE	S		L	
		Inch	mm	Inch	mm
29732	#6x1"	Full	Full	0.95"~1.00"	24.2~25.4
29733,51268	#6x1-1/4"	0.78"~0.87"	20~22	1.20"~1.25"	30.5~31.7
35083	#6x1-1/2"	0.90"~0.99"	23~25	1.45"~1.50"	36.9~38.1
35084	#6x2"	1.18"~1.30"	30~33	1.95"~2.00"	49.6~50.8

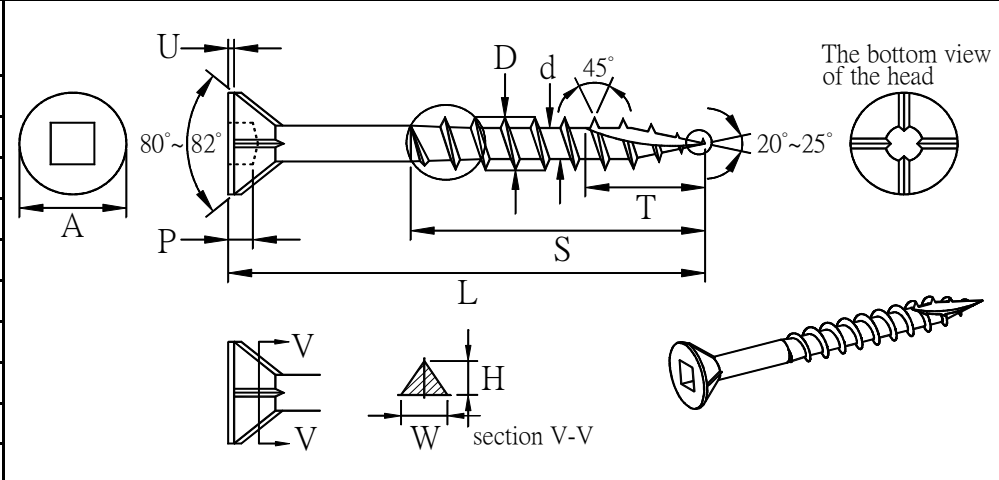

Date	Dim./Spec.	Old	New

Unit	Size/ Thrds	A	U	Gage		W	H	D	d	T	Wire	Torque
				Square								
				Recess	P							
Inch	#6-13	0.275"	0.032"	#2	0.065"	0.032"	0.028"	0.141"	0.088"	0.276"	0.099"	18 lbf.in
		0.260"	0.019"		0.056"	0.019"	0.015"	0.135"	0.078"	0.196"		
mm	#6-13	6.98	0.80	#2	1.65	0.80	0.70	3.58	2.21	7.00	2.50	21 kgf.cm
		6.61	0.50		1.43	0.50	0.40	3.45	2.00	5.00		

**Specification**  
 Material: SAE C1018 / C1022  
 Recess: #2 Square  
 Head: Flat head w/4Ribs  
 Thread: 45°Thread+TY-17  
 Heat Treatment: Surface hardness: HV450~800 ; Core hardness: HV320~450  
 Bending Angle: >15°Breaking  
 Surface:  Zinc  
 Dry Black Phos 48HR

Customer Approve: w/date	
Approved by : w/date	
CAD by : w/date	Yu Chen Lin 2017.5.17
Issued date :	2017.5.17 year-month-day