

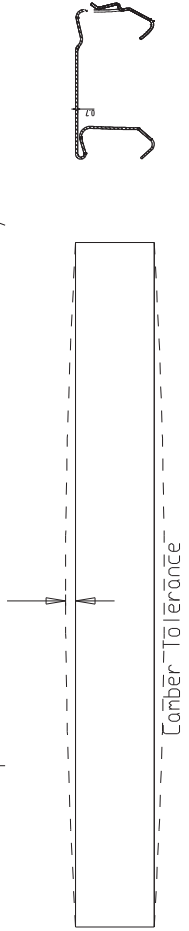


.010" (0.25mm) per 12 in (305mm) Max Camber Either Way

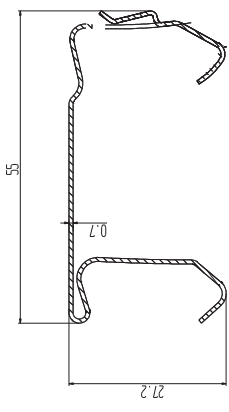

.010" (0.25mm) per 12 in (305mm) Max Bow Either Way

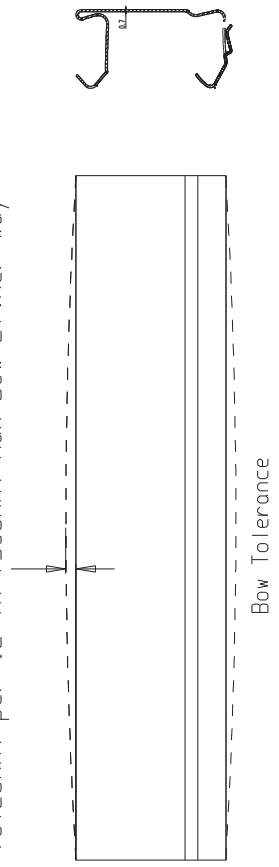

MAT'L	L	A	B	M	N	Item
Steel	48"	3"	2"	5	7	145TT048WIP/145TT048SIP/145TT048GLIP
Steel	60"	2"	2.5"	6	9	145TT060WIP/145TT060SIP/145TT060GLIP
Steel	72"	1"	3"	7	11	145TT072WIP/145TT072SIP/145TT072GLIP
Steel	96"	2.5"	4"	9	14	145TT096WIP/145TT096SIP/145TT096GLIP
Steel	144"	2"	0.5"	14	21	145TT144WIP/145TT144SIP/145TT144GLIP

ONWARD Div of Richelieu

TOLERANCE UNLESS NOTED:	DRAWN:	DATE:
X/XX ±1/64 X: min ±.5	CHECKED:	DATE:
.XX" ±.010 X: min ±.2	MATERIAL: .7mm (.027 in) C.R.S.	
.XXX" ±.005 X: min ±.1	FINISH: PAINTED	
ANGLES ±2°		

THIS DOCUMENT IS THE PROPERTY OF ONWARD AND IS FURNISHED ON THE CONDITION IT IS LOANED TO YOU. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT OUR WRITTEN CONSENT.

TITLE: Bypass Door Top Track