




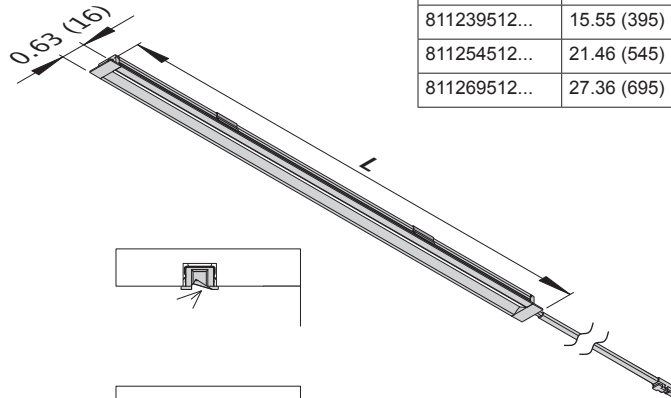

24V DC 3000K
4000K

Typ	L-1 in (mm)	X ± 0.02 (0,5 mm)	Watt
811209512...	3.74 (95)	3.58 (91)	1.0
811212012...	4.72 (120)	4.57 (116)	2.0
811224512...	9.65 (245)	9.49 (241)	3.9
811239512...	15.55 (395)	15.39 (391)	6.8
811254512...	21.46 (545)	21.29 (541)	9.6
811269512...	27.36 (695)	27.20 (691)	12.5




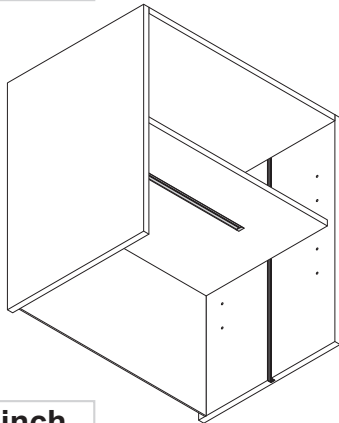


inch
(mm)

CAUTION
RISK OF ELEKTRIC SHOCK
DRY LOCATION USE ONLY

USE ONLY WITH
CLASS 2 POWER UNIT

FOR WALL; CEILING,
UNDER-CABINET OR
CABINET USE ONLY

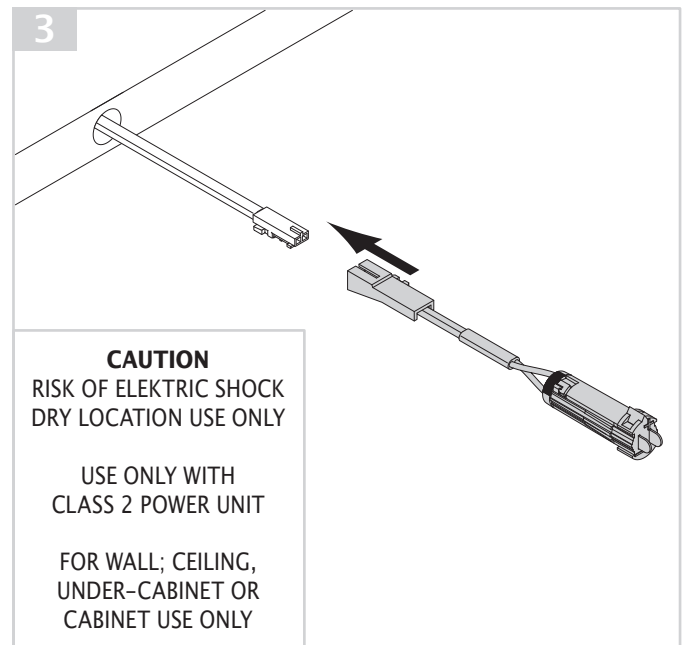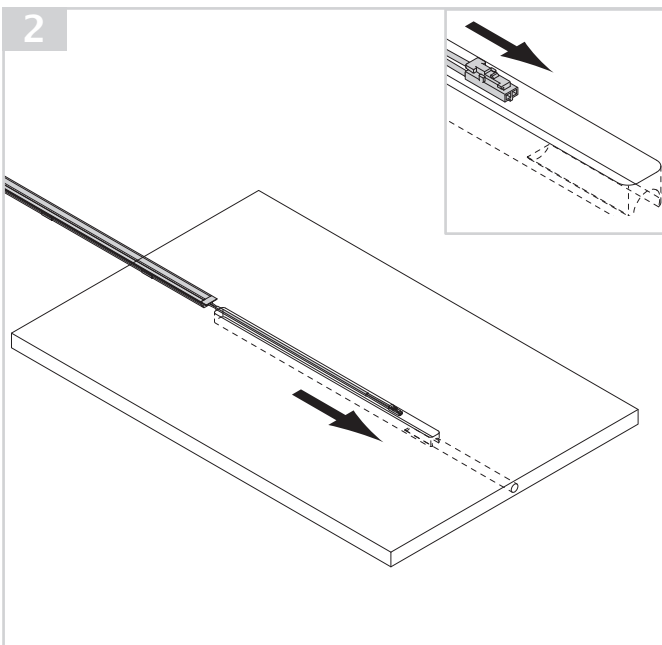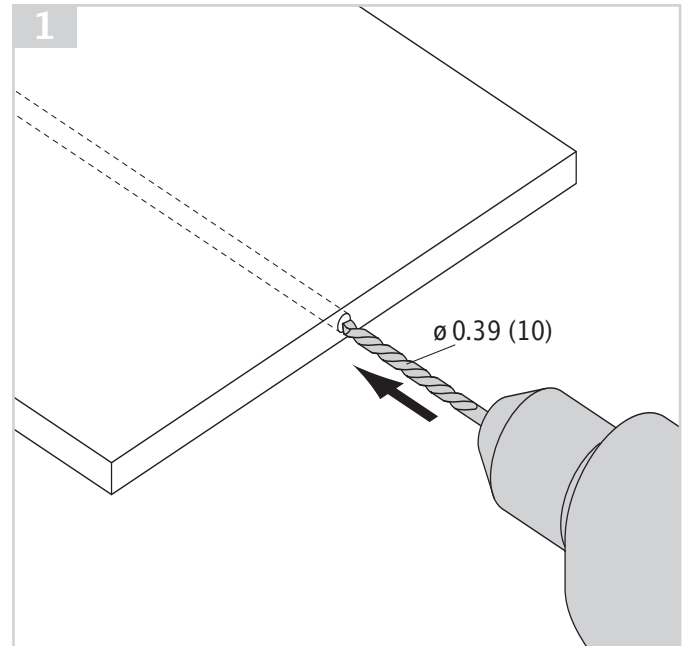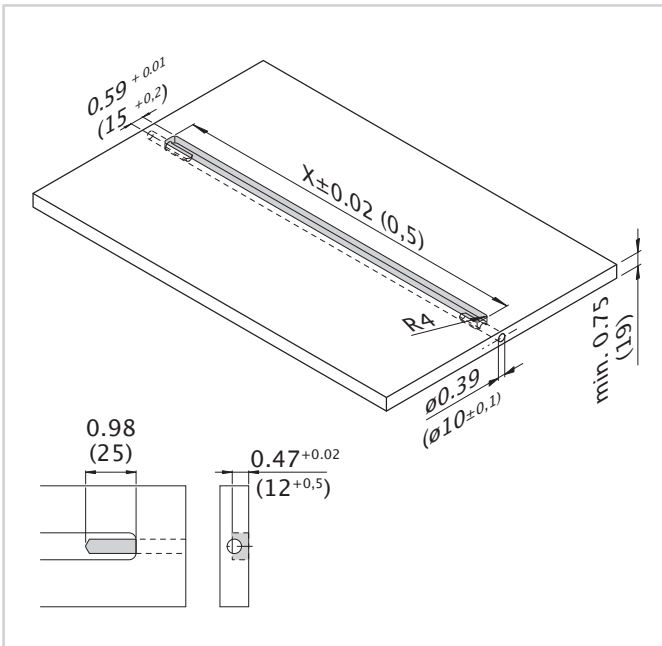

CAUTION
RISK OF ELEKTRIC SHOCK
DRY LOCATION USE ONLY

USE ONLY WITH
CLASS 2 POWER UNIT

FOR WALL; CEILING,
UNDER-CABINET OR
CABINET USE ONLY

