




Brand	Root
	<b>FPCZ...</b>

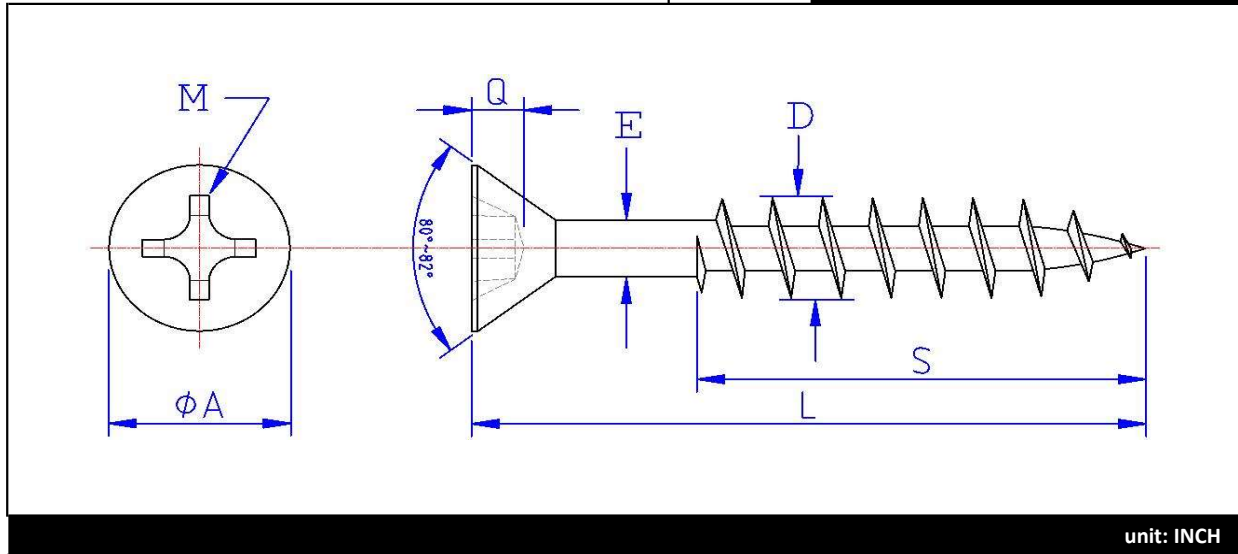

unit: INCH

<b>L</b> LENGTH TOLERANCE	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05
	> 1-1/2" to ≤ 2-3/4"	+ 0	- 0.06
	> 2-3/4"	+ 0	- 0.09

<b>S</b> THREAD LENGTH	< 1"	Full Thread
	≥ 1"	2/3 Thread

SCREW SIZE	M PUNCH		Q GAGING DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH	TORK INCH/ POUND
# 4	# 1	Min	0.066	0.195	0.080	0.116	14	12
		Max	0.082	0.225	0.085	0.125		
# 5	# 2	Min	0.052	0.220	0.092	0.129	13	18
		Max	0.075	0.252	0.097	0.138		
# 6	# 2	Min	0.072	0.244	0.103	0.142	12	24
		Max	0.095	0.279	0.108	0.153		
# 7	# 2	Min	0.080	0.268	0.112	0.159	11	30
		Max	0.103	0.305	0.117	0.166		
# 8	# 2	Min	0.087	0.292	0.121	0.168	10	39
		Max	0.110	0.332	0.126	0.179		

**Flat Countersunk Head, Phillips recess, Wood Screw, Coarse Thread  
Zinc plated**

Root= Flat Phillips Coarse Zinc

**Bulk Label Description:**

English: FLAT HEAD, PHILLIPS, COARSE THREAD, WOD SCREW, ZINC

French: VIS À BOIS, GROS FILET, TÊTE PLATE, CRUCIFORME, ZINC

Spanish: TORNILLO PARA MADERA, ROSCA GRUESA, CABEZA PLANA, CRUCIFORME, ZINC

Date: January 14, 2022

Done by: P.B.